



PITCH RECONSTRUCTION CONSULTANT



The contract delivered with our group Sports Labs for South Dublin City Council was for the provision of consultancy services of a sand based GAA pitch at Tallaght, Dublin.

SITE PREPARATIONS

On behalf of the client overseeing the contractors ability to secure the site, taking down existing goals, ball-stop fencing, removing a section of footpath, while rerouting a new section of footpath.

EXCAVATE TOPSOIL

Overseeing the excavation of topsoil materials that were scraped off to create central balance areas. Sub-soil earthworks for slope and evenness of a 148.0m x 81.0m pitch platform.

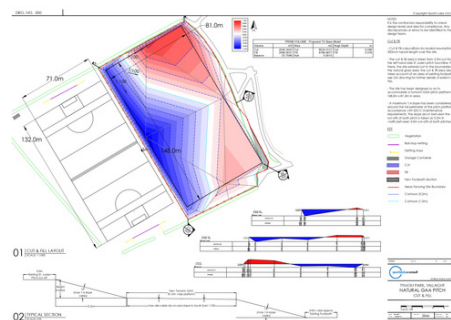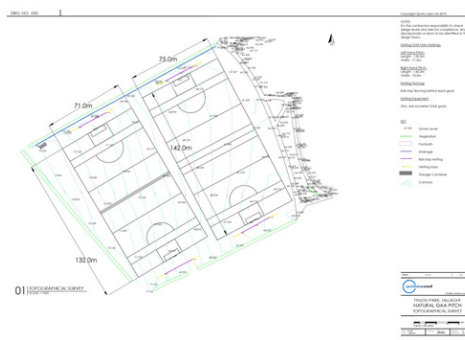

Site preparations


Excavation of topsoil materials

Installation of drainage systems

Grass establishment

INSTALLATION OF DRAINAGE SYSTEM

The installation of a new primary parallel drainage system complete with carrier and manholes to outfall at a nearby lake. A secondary drainage system involving sand-splitting was installed over entire platform area. Providing the layout drawings and quality controlling the installation by the contractor prior to moving on to the next construction stage.

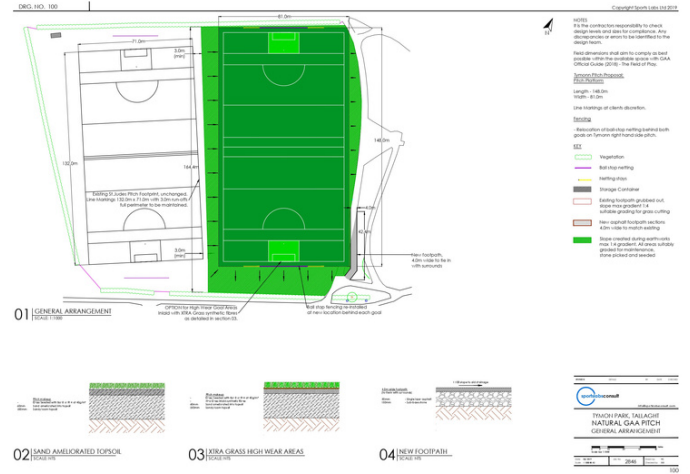

PLACEMENT AND IMPROVEMENT

ProPitch were on site to oversee the placement and improvement of existing topsoil, which was to be spread over the entire pitch (subject to herbicide application, de-stoning, sand amelioration, seeding).



GRASS ESTABLISHMENT

To get the pitch green and ready for play, grass establishment and maintenance works on the pitch is a critical step to get right. Allowing the roots to develop to sufficient depth provides player underfoot stability and a surface ready to stand up to intense usage.

RE-INSTALL EQUIPMENT

Re-installation of all stop netting and equipment was the final step before allowing the players to take to the pitch again.